



**Project Title:** "Low-frequency multi-mode (SAR and penetrating) radar onboard light-weight UAV for Earth and Planetary exploration"

**Call:** H2020-MSCA-RISE-2020

## WP5 – Model Qualification Campaign

### D5.2: Qualification Report

<b>Lead contributor</b>	Centrum Badań Kosmicznych Polskiej Akademii Nauk (CBK PAN)
<b>Other contributors</b>	Consorzio di Ricerca su Sistemi di Telesensori Avanzati (CO.R.I.S.T.A)
	Université Claude Bernarde Lyon 1 (UCBL1)
	Hyperion Seven (Hyperion)
	IRSPS srl (IRSPS)
<b>Due date</b>	31 Mar 2023
<b>Delivery date</b>	29 July 2025 for version 2.0
<b>Deliverable type</b>	Report
<b>Dissemination level</b>	PU

### Document History

Version	Date	Description
V1.0	31 May 2022	Pre-Flight campaign version
V1.1	15 Jan 2024	Qualification Report, final
V2.0	28 July 2025	Final version





## **List of Abbreviations**

QP Qualification Plan

SAR Synthetic Aperture Radar

UAV Unmanned Aerial Vehicle

WP Work Package





## Table of Contents

1. Introduction	5
2. Indoor test of the radar unit	5
3. Dummy-payload flight tests	10
4. Post-integration flight	12
5. Conclusion	18
6. References	19
7. Annexe: Table of qualification results	19





## **Publishable summary**

This report details a series of tests conducted on the FlyRadar project to evaluate the performance and reliability of the radar system, as well as the flight performance of the drone with a dummy payload matching the radar unit's specifications. The indoor tests include evaluations of the radar unit in sounding and SAR modes, examining signal transmission, penetration depth, and signal reception under different configurations. In both modes, the transmitted signal met specified frequency and bandwidth requirements. Signal reception tests confirmed the coherence of the received signal, with no observed jitter, suggesting successful radar operation. In SAR mode specifically, signal reception tests indicated strong coherence pulse by pulse, supporting synthetic aperture processing. However, potential coupling issues were noted in one test, requiring further evaluation under real-life conditions. Flight tests with a dummy payload were conducted to validate the antenna and radar mounting system on the UAV. Two flights were performed with varying payload masses and flight plans. Autonomy and range requirements were met by the system. The integrated configuration demonstrated stability under slightly windy conditions, and dynamic flight mode was recommended for operational stability.





## 1. Introduction

This report presents a series of tests conducted on the FlyRadar project. The objective of these tests was to evaluate the performance and reliability of the radar system under various configurations and modes as well as the flight performances of the drone with a dummy payload matching the weight and span of the radar unit with its antennas.

## 2. Indoor test of the radar unit

### 2.1. *Conditions of the test and material*

The indoor tests on the radar unit were carried on at the *Consorzio di Ricerca su Sistemi di Telesensori Avanzati* (CO.RI.S.T.A) facilities in Naples in December 2023. The radar apparatus consists of the *Ettus E320* (ref) Software-defined Radio (SDR) connected to an ODSS R86S mini-computer (ref). The tests were performed on sounding and SAR modes at nominal frequencies and 10 dBm with Yagi and Logperiodic antenna types respectively.

Three different configurations were used to test different aspects of the radar unit:

- Configuration 1: the radar is connected directly through the TX port to a spectrum analyser.
- Configuration 2: the radar TX port is connected to a 6-dB divider which splits the signal to a spectrum analyser and a 40-dB attenuator. The latter is connected back to the RX port of the radar (Fig. X)
- Configuration 3: TX and RX antennas are connected directly to the radar. The antennas are pointed towards a target located 60 m away.

### 2.2. *Sounding mode*

#### 2.2.1. Transmitted signal: Frequency and bandwidth

The first test was performed in Config. 1 and consisted of checking the transmitted signal by the radar with a spectrum analyser. Using the inboard software, the signal was set to a maximum value of 10 dBm and successfully transmitted at 80 MHz with a 10 MHz bandwidth. These values are consistent with the requirements presented in the qualification plan (deliverable 5.1).

#### 2.2.2. Theoretical penetration depth

Theoretical penetration depths were estimated for such frequency assuming diverse geological settings to range from 2 to 50 m. As the transmitted signal frequency is consistent with the frequency used to model the penetration depth, it should match the initial requirements.



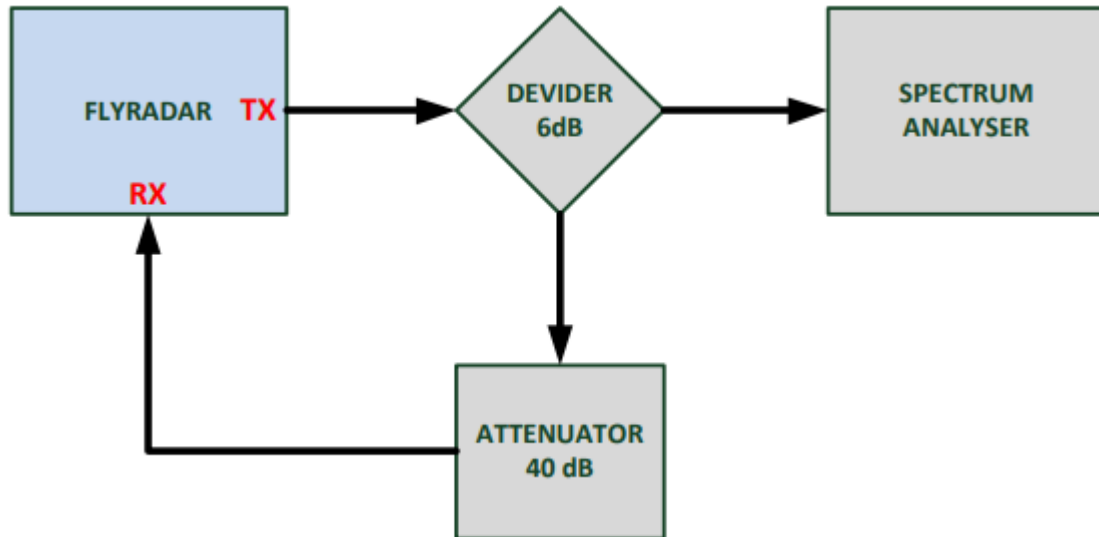


Figure 2-1: Test Configuration 2 (extracted from Co.Ri.S.T.A test report).

### 2.2.3. Signal reception

A second and third tests were performed in Config. 2 and 3 to check the received signal on the radar. In the test nr. 2, the transmitted 10 dBm signal is parsed through a resistive 6 dB divider attenuator and checked with a spectrum analyser on one channel (Fig. 1). The signal was measured at 80 MHz with 10 MHz bandwidth, at 3.67 dBm. On the other channel, the signal is parsed through a 40 dB attenuator and acquired by the radar software. The signal consisted of 4065, 500  $\mu$ s-long pulses. Each pulse had a peak amplitude of 32 dB on the main lobe (Fig 2, left). The peak position was measured at  $t=10.5 \mu$ s (Fig. 2), which can be explained by the travel distance between the TX output to the RX input with several metres of cables as well as the delay induced by the internal hardware and the software itself. Figure 2, right, shows a strong coherence between each pulse during the whole duration of the test and a lack of jitter at that level of sampling.

In the third test, the signal is transmitted through a TX antenna, received by the RX antenna, and analysed by the radar software. The received signal was measured to peak around  $t=10.9 \mu$ s with an amplitude of 29 dB (Fig. 3). The strength of the signal is consistent with a signal being reflected by a surface and is less likely to correspond to a product of antenna mutual coupling (i.e. energy absorbed by a receiving antenna from a nearby operating antenna). Additionally, the 0.4  $\mu$ s delay difference between the closed-loop configuration in the second test is consistent with a travel time of a 60 m round-trip between the radar apparatus and the targeted surface.



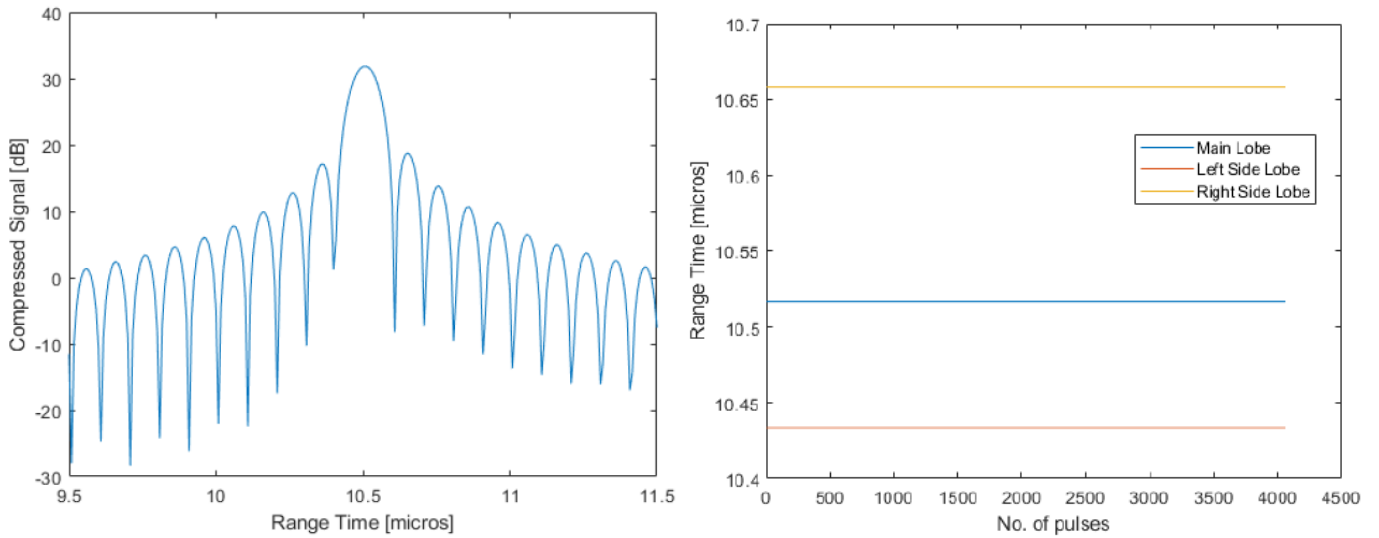


Figure 2-2: Test nr. 2 results; Left: compressed signal zoomed on the maximum value. Right: Compressed signal peak position throughout the test

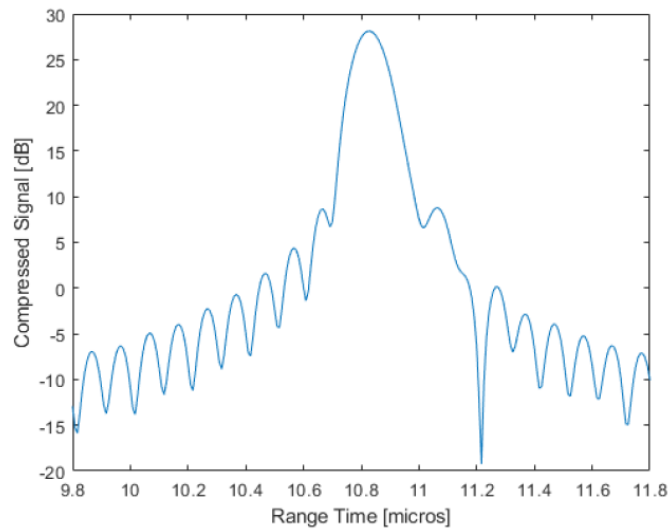


Figure 2-3 Compressed signal zoomed on the maximum value (Test nr. 3)



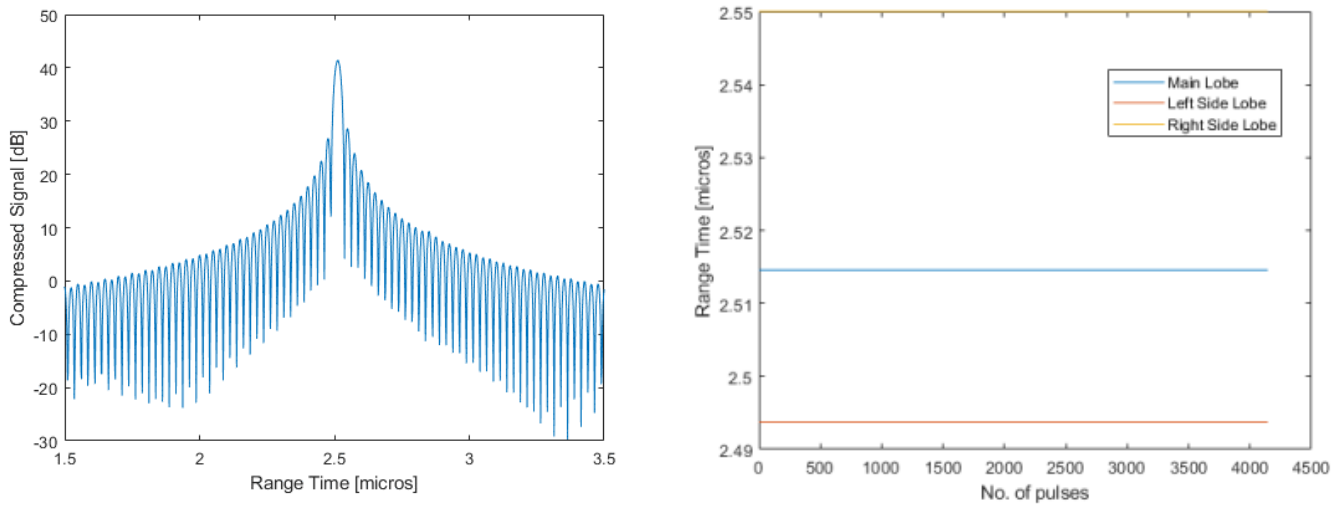


Figure 2-4: Test nr. 5 results; Left: compressed signal zoomed on the maximum value. Right: Compressed signal peak position throughout the test

## 2.3. SAR mode


### 2.3.1. Frequency and bandwidth

The fourth test was performed in SAR mode under Config. 1 and consisted of checking the frequency and bandwidth transmitted by the radar unit. The signal was successfully transmitted at 435 MHz with a 40.25 MHz bandwidth, within the range of the requirements.

### 2.3.2. Signal reception

Similar to the tests performed in sounding mode, the signal reception in SAR mode was tested in Config. 2 and 3. The test nr. 5, in a closed loop configuration, the signal transmitted of 4144, 500  $\mu$ s-long pulses. The main lobe peak position occurred at  $t=2.5 \mu$ s (Fig. 4) and was stable during the whole duration of the test (Fig. 4, right). The signal obtained in Config. 3 in the sixth and last test could however indicate some coupling (Fig. 5), although, real life test conditions following the full system integration would be required to assess that. This could be mitigated by using a window to reduce the side-lobe level. Overall, the lack of jitter observed in the test nr. 5 shows that the signal is strongly coherent pulse by pulse, which should allow for synthetic aperture processing.



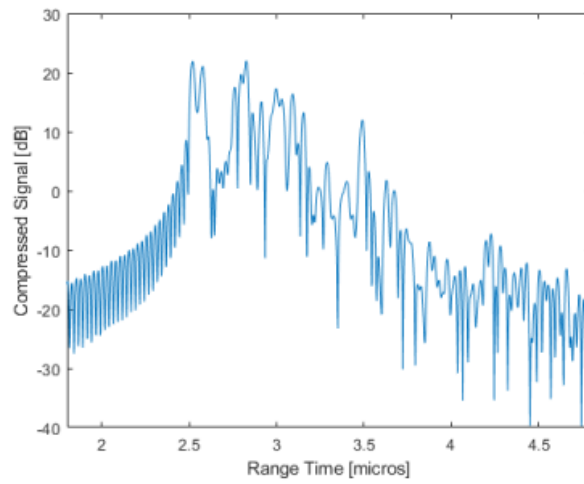

*Figure 2-5: Compressed signal with a zoom around maximum value (test nr. 6)*





Figure 6: mounting configuration of the antennas and the dummy radar.



Figure 7: In-flight UAV with attached antennas and dummy payload.

### 3. Dummy-payload flight tests

The purpose of the tests carried out and described down below is validate the antenna and radar mounting system on the UAV (Fig. 6) and check the in-flight performances of the fully integrated system against the requirements described in the qualification plan (deliverable 5.1).

#### 3.1. *Flight plan and conditions*

##### 3.1.1. First flight

The first flight was performed in February 2023 in the vicinity of Hyperion Seven facilities (Fig. 7). The two antennas (0.8 kg) as well as a 2.2 kg box matching the radar mass were mounted to the UAV. The flight plan consisted of a set of straight lines, cumulating 5.3 km of distance, and for a duration of 12 min. The aircraft reached a maximum speed of  $17.8 \text{ m.s}^{-1}$  and an average of  $8.4 \text{ m.s}^{-1}$ . The weather was clear with little to no wind.



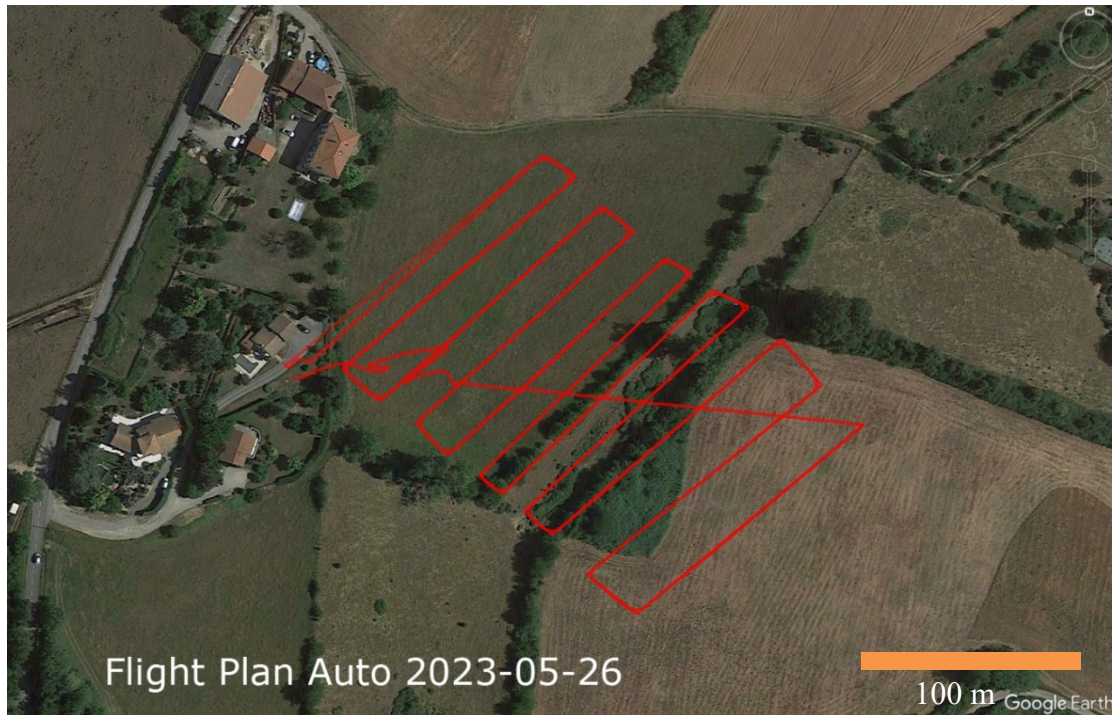


Figure 8: Flight plan of the second flight (May 2023)

### 3.1.2. Second flight

The second flight was performed in May 2023 in similar conditions as the first one, although the dummy radar mass was increased from 2.2 to 3.2 kg. In addition, a spacer was added to the antennas bringing the total payload mass to 4.5 kg. A more specific flight plan was defined beforehand and consisted of 11 successive straight and parallel lines of 140 m each, simulating a radar survey (Fig. 8). The cumulative distance covered was 1.5 km. The altitude of operation was set to 50 m and the speed to  $10 \text{ m}\cdot\text{s}^{-1}$  with decreased speed during turns to keep the aircraft stable. The weather was slightly windy with average wind speed of  $6 \text{ km}\cdot\text{h}^{-1}$  and gusts up to  $20 \text{ km}\cdot\text{h}^{-1}$  (or  $5.5 \text{ m}\cdot\text{s}^{-1}$ ).

### 3.2. *Autonomy and range*

Assuming a 20 percent safety of margin, the extrapolated autonomy is estimated to be 19 and 30 min for the heavy and light payload configurations respectively. With an average speed of  $8.4 \text{ m}\cdot\text{s}^{-1}$ , the minimum range is estimated to be 9.56 km with a 4.5 kg payload. The range can be improved to 15 km assuming a 3 kg total payload. The range required by the qualification plan was set to 15 km, meaning that this could be reached only by keeping the payload light or increase the average speed (i.e. longer straight lines and less turns).



### 3.3. *Mounting and stability*

The integrated configuration is stable under slightly windy conditions ( $5.5 \text{ m.s}^{-1}$ ). However, the qualification required nominal flight attitude up to  $11 \text{ m.s}^{-1}$ , but these weather conditions were not met during the tests reported here. Experience from these flights show nonetheless that even small gusts could lead to unstable conditions for the UAV, and rolling movements should be avoided. Generally, dynamic flight mode showed better stability than hovering mode and, therefore, should be preferred during real operations.

## 4. **Post-integration flight**

### 4.1. Integration

### 4.2. Flight plan and conditions

### 4.3. Radar performance

Tests on FlyRadar prototype have been performed at University of Lyon (“Laboratoire de Géologie de Lyon”) premises on June 26th-27th. The first day, indoor tests have been performed while the second day field test have been performed at Vernay.

All tests have been performed with radar and antennas mounted on drone, in final flight configuration. Radar parameters set for all tests are reported in

- Pulse duration  $682.67 \mu\text{s}$
- Transmitted bandwidth  $40 \text{ MHz}$
- Sampling frequency  $48 \text{ MHz}$
- Centre frequency  $435 \text{ MHz}$
- Pulse Repetition Frequency (PRF)  $200 \text{ Hz}$

Since it was not possible to flight in sounder mode due to serious damage occurred to sounder antenna during integration test flight, only SAR mode has been exploited. Following paragraphs describe performed test and main results obtained.

#### 4.3.1. Sounding mode

#### 4.3.2. SAR mode

##### 4.3.2.1. Indoor tests

Main goal of these tests is to verify the correct functioning of radar system to transmit and receive signal and to characterise antenna coupling.

First tests have been performed in laboratory room, both in HH and VV configurations.





Figure 4-1 shows received and averaged signal in time (left) and frequency (right) domains, for HH configuration. From leftward plot it is evident a limited amount of saturation, while rightward plot confirms transmitted bandwidth value.

Figure 4-2 shows some results of compressed and averaged signal. In particular, leftward plot shows peak value of coupling and rightward plot the received signal amplitude.

Same test has been performed in VV polarisation and results are shown in Figure 4-3 and Figure 4-4. No significant differences can be highlighted, but a small decrease of peak value on compressed signal.

Some other tests have been performed by positioning radar system on the roof (6th floor) of university building and pointing antennas toward ground. Figure 4-5 shows received signal amplitude for HH (left) and VV (right) configuration for the compressed and averaged signal. From rightward plot (VV) it is evident a target at about 0.6  $\mu$ s of delay, corresponding to about 90 m.

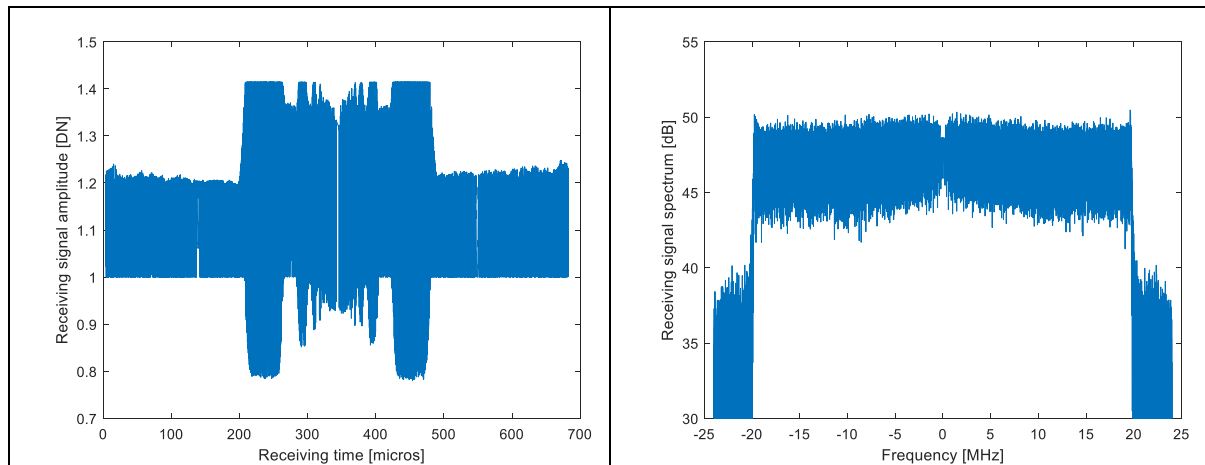


Figure 4-1– Laboratory test, HH configuration: received and averaged signal in time (left) and frequency (right) domains.



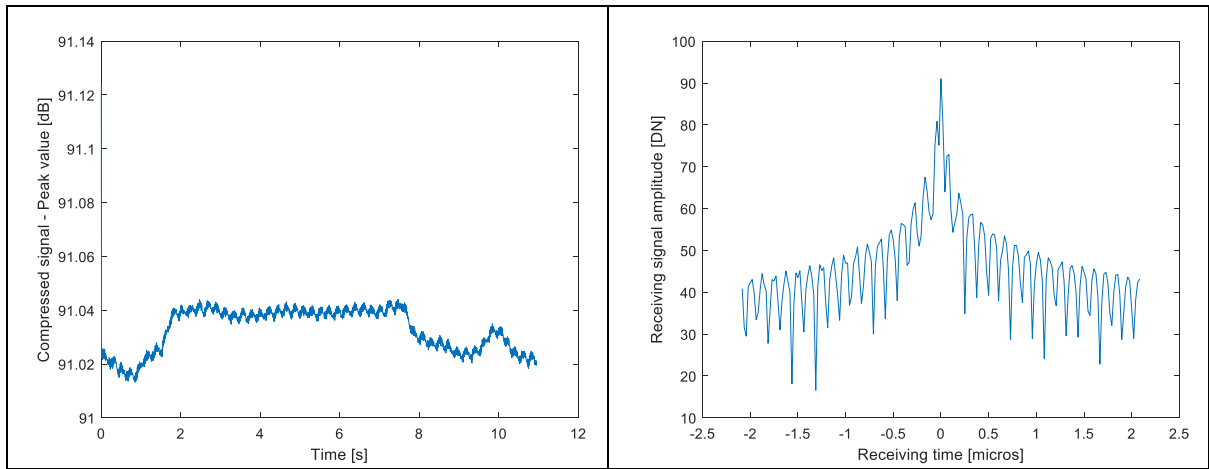


Figure 4-2– Laboratory test, HH configuration, compressed and averaged signal: peak value (left) and received signal amplitude (right).

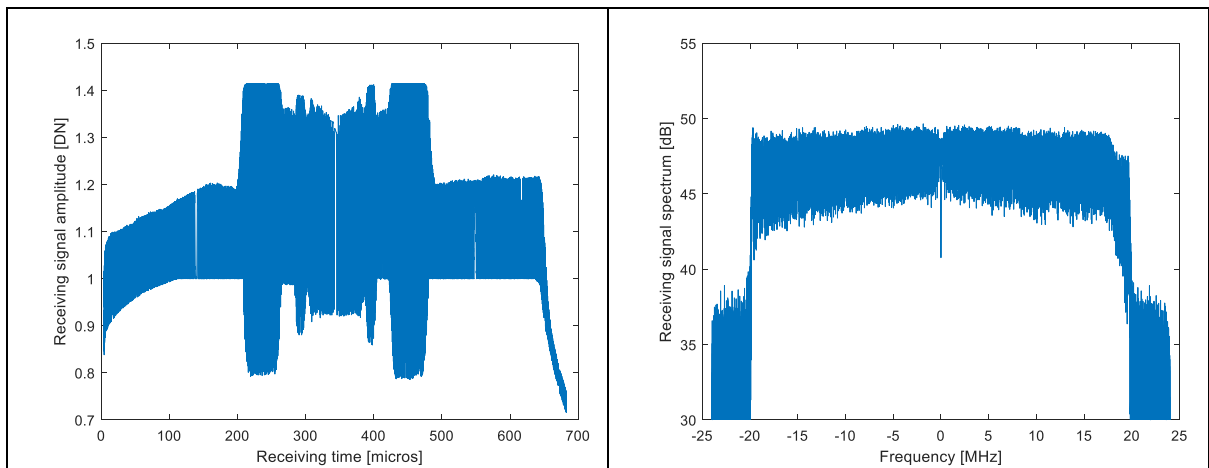


Figure 4-3– Laboratory test, VV configuration: received and averaged signal in time (left) and frequency (right) domains.



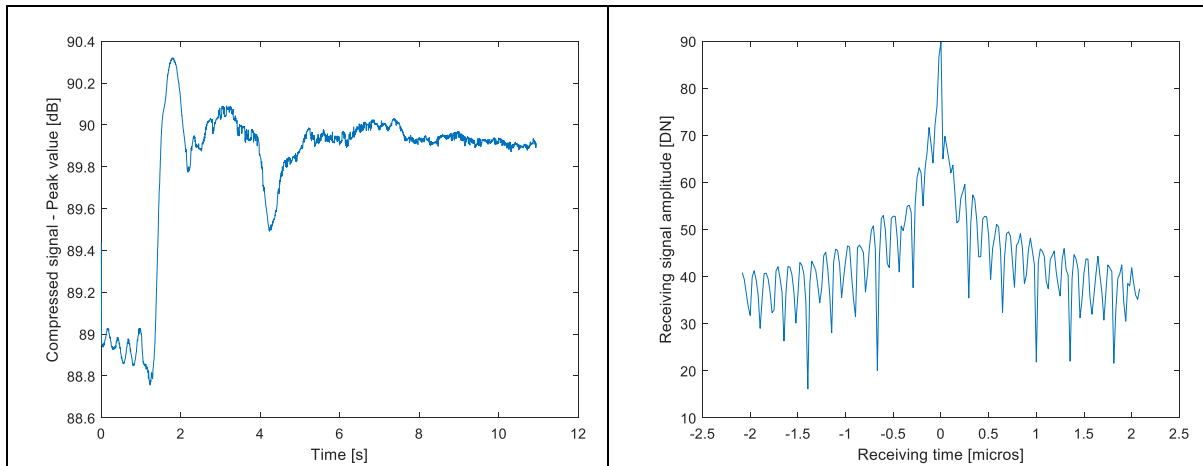


Figure 4-4– Laboratory test, VV configuration, compressed and averaged signal: peak value (left) and received signal amplitude (right).

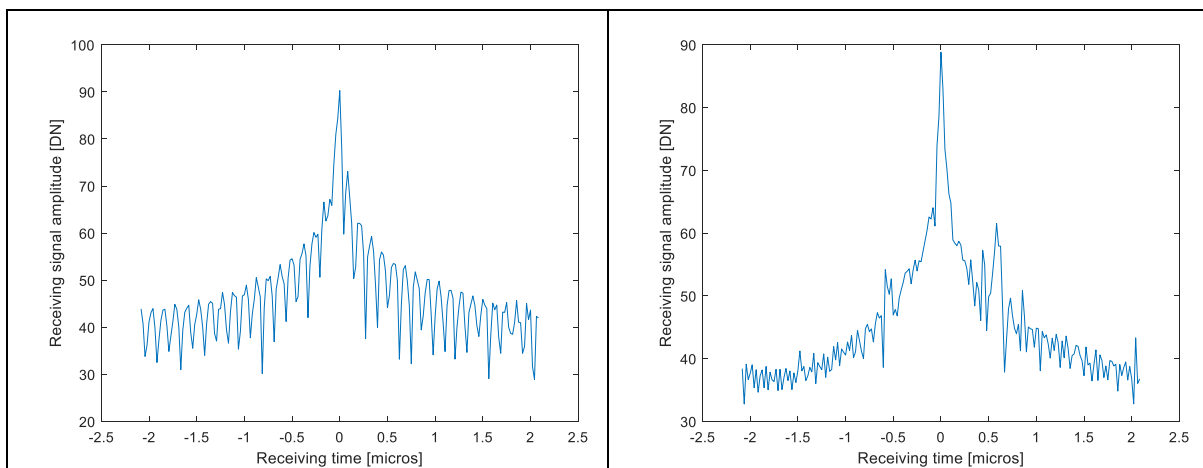


Figure 4-5– Laboratory test, compressed and averaged signal: received signal amplitude for HH (left) and VV (right) configuration.

#### 4.3.2.2. Field tests

Main goal of these tests is to verify the correct functioning of radar system to transmit and receive signal, to characterise antenna coupling and, mainly, to verify flight capability in real environment.

Field tests have been conducted in Vernay, near to an archaeological site.

Tests have been performed in both HH and VV configurations, and corresponding tracks are shown in Figure 4-6.

Figure 4-7 show received and averaged signal in time (left) and frequency (right) domains, for HH configuration. In this case, no signal saturation is present.





Figure 4-8 shows the obtained unfocused image, where bright targets can be identified. Same plots for VV polarisation are reported in Figure 4-9 and Figure 4-10. In this case, received and averaged signal in time (left) and frequency (right) domains of **Error! Reference source not found.** is very different to that obtained by indoor tests. Also in case of VV polarisation, unfocused image (**Error! Reference source not found.**) shows bright targets and features.

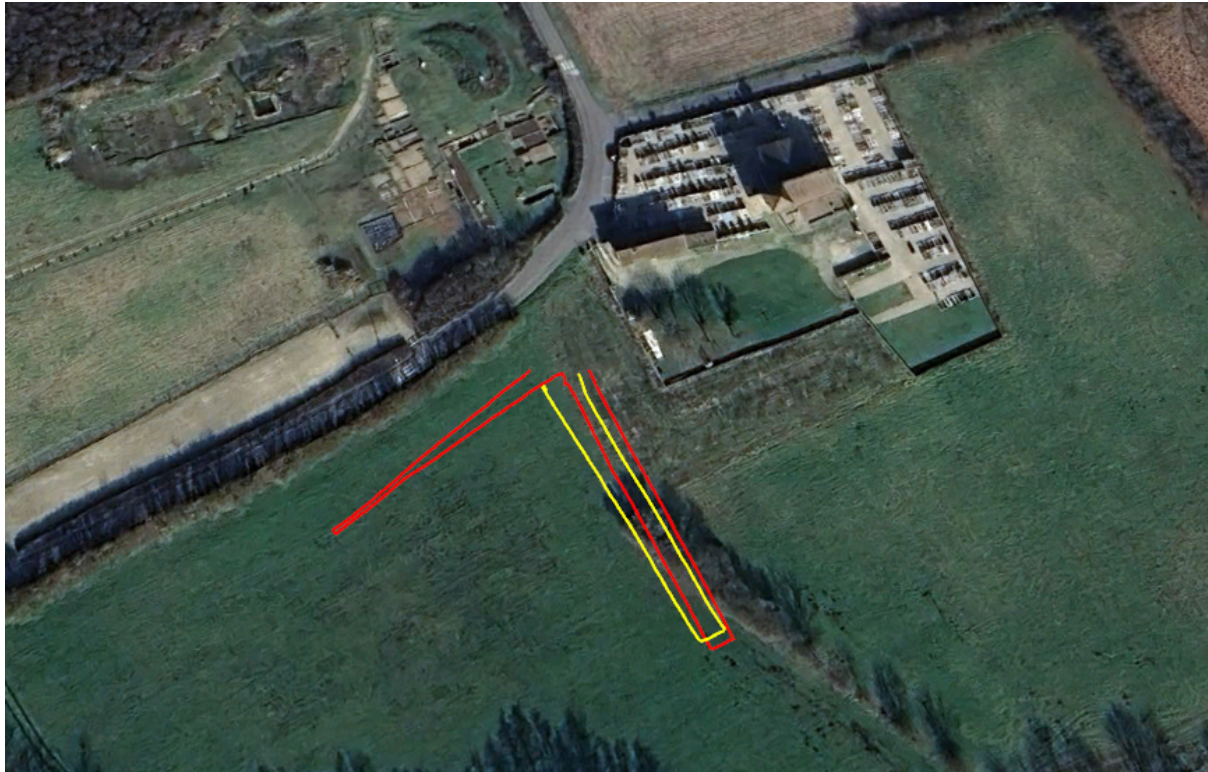


Figure 4-6– Field test tracks: HH in red and VV in azimuth.

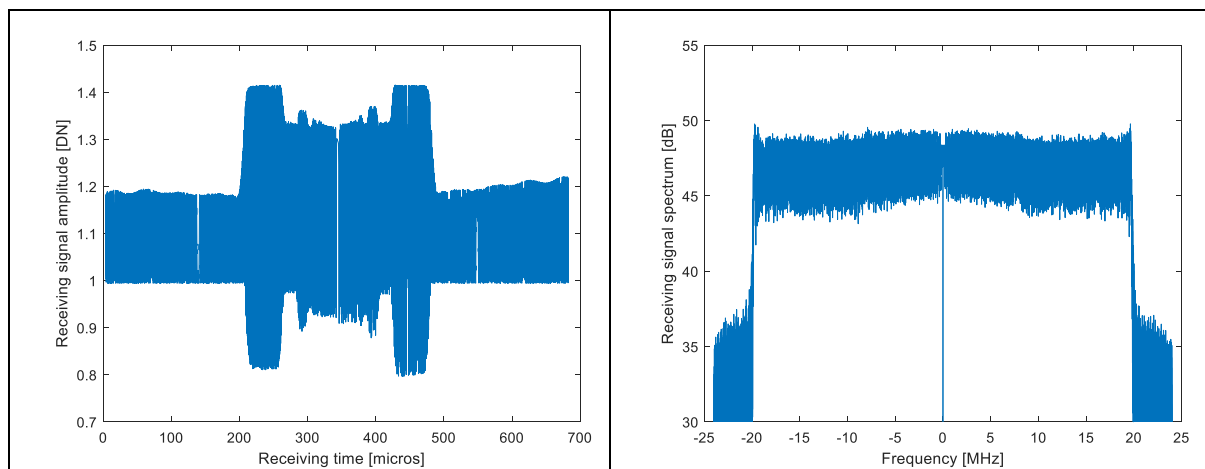




Figure 4-7– Field test, HH configuration: received and averaged signal in time (left) and frequency (right) domains.

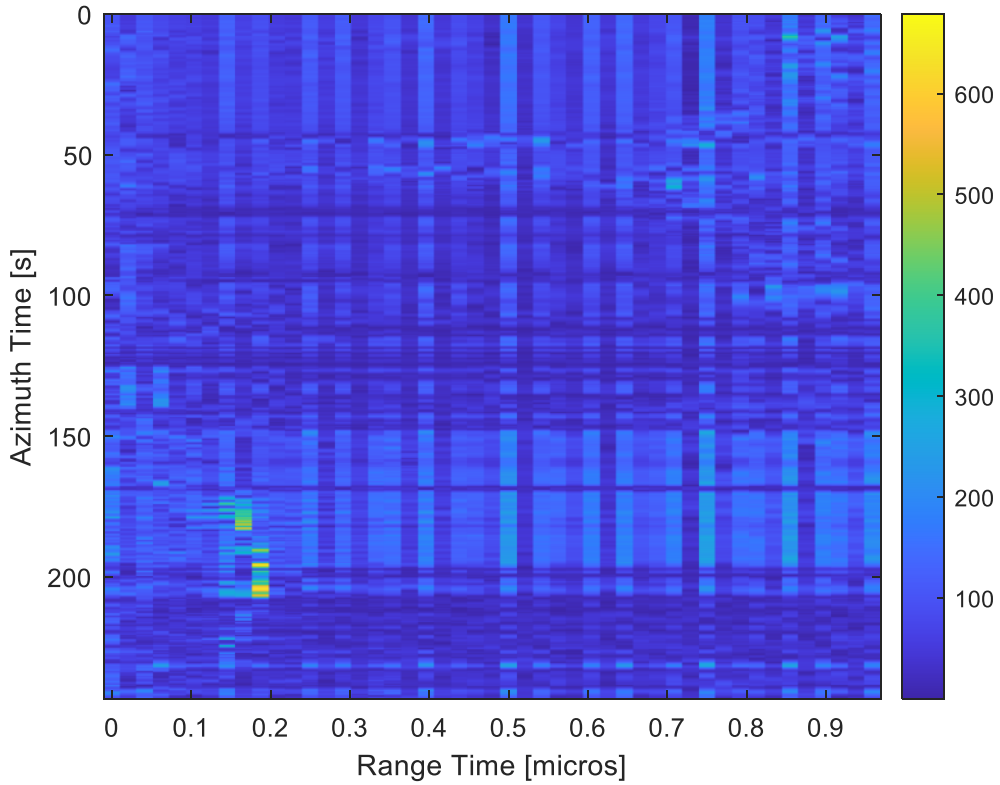


Figure 4-8 - Field test, HH configuration: unfocused image.

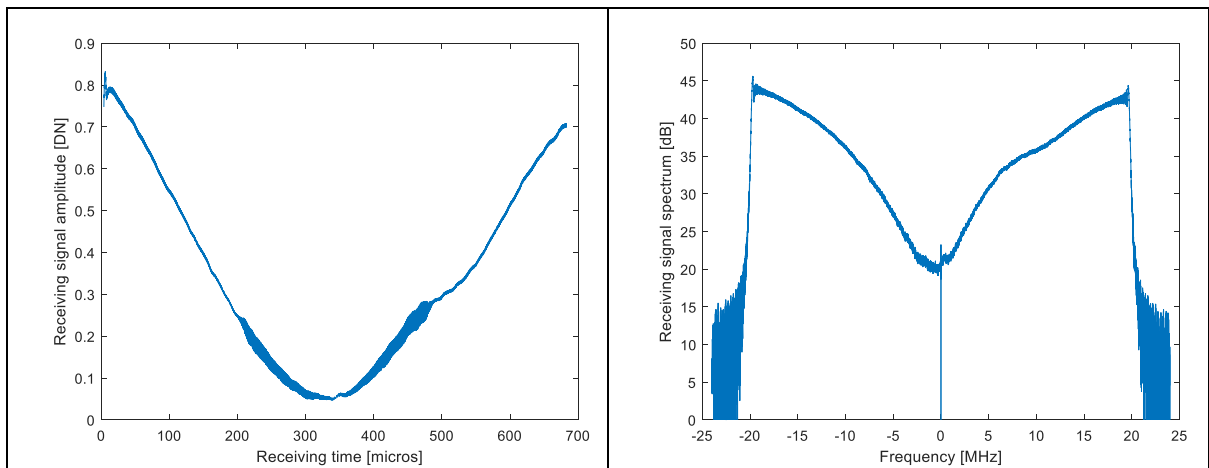


Figure 4-9– Field test, VV configuration: received and averaged signal in time (left) and frequency (right) domains.



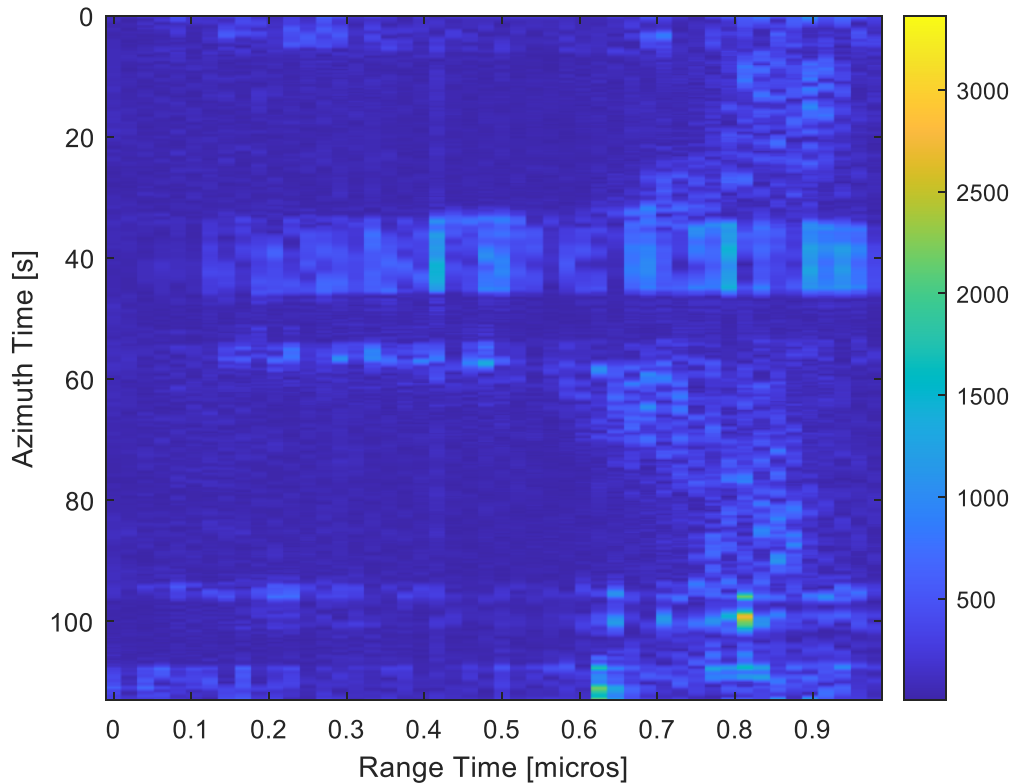


Figure 4-10– Field test, VV configuration: unfocused image.

#### 4.4. Weather conditions

### 5. Conclusion

The qualification campaign of FlyRadar demonstrated that, concerning the radar, signal generation and acquisition is nominal, and that no antenna coupling could be identified during the indoor tests. With a high degree of oversampling, no jitter could be measured which should therefore allow for synthetic aperture processing. Future outdoor tests, post-integration should test the actual radar system performance.

Test flights demonstrated that the mounting of the antennas as well as a dummy payload matching the radar mass allowed for nominal flight conditions. The system should allow for a minimum range of 9.5 km but up to 18 km, close to the required value (15 km). Stability was ensured despite slightly windy conditions, at 50 m of elevation, although dynamic flight mode should be preferred. Future tests should demonstrate the ability to operate under hot temperatures (45°C) and the ability to perform a real survey.





## **6. References**

- Radar testing report – PBN-COR/NTE/005/23 – Giovanni Alberti, Luca Ciofaniell; 6<sup>th</sup> January 2024. Co.Ri.S.T.A.
- Antennas flight test report #1 – Philippe Grandjean; 15<sup>th</sup> February 2023, Hyperion Seven
- Antennas flight test report #2 – Philippe Grandjean; 1<sup>st</sup> June 2023, Hyperion Seven
- FlyRadar D5.1: Qualification Plan

## **7. Annexe: Table of qualification results**

Disclaimer: This report reflects only the author's view. The Research Executive Agency (REA) is not responsible for any use that may be made of the information it contains.

